


NORSHIRE G2 Series Instructions


High Accuracy Tire Pressure Gauge



Backlight Key (-)

Power Key (switch)

HOLD Key (+)

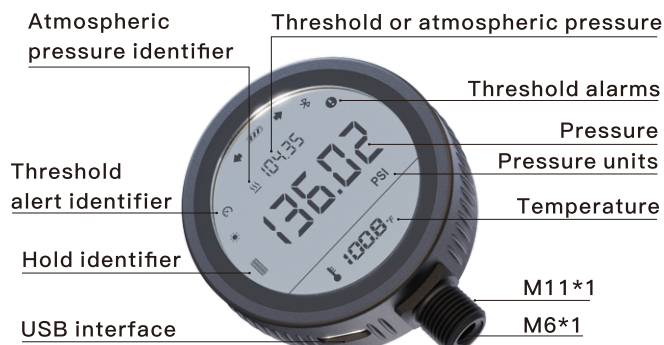

1. Power Key (switch)

Press and hold the power key for 2 seconds to turn the device on/off.

During these 2 seconds:

The first row of the screen shows the current atmospheric pressure. The second row shows the battery voltage. The third row displays the temperature.

Zero-point calibration occurs at this time—do not connect any pressure source.

After powering on, the second row shows tire pressure.

Short-press the power key to cycle through tire pressure units and temperature units.

2. Backlight Key (-)

Short-press to decrease the upper pressure alarm limit.

When the first row turned into '0', the current atmospheric pressure is displayed.

Press and hold for 2 seconds to turn the backlight on/off.

3. HOLD Key (+)

Short-press to increase the upper pressure alarm limit.

Press and hold for 2 seconds to hold the maximum pressure reading.

4. Additional Function

Press and hold both the (-) key and the power key for 2 seconds to enable auto-shutdown after 1 hour.

5. After-sales service

All NORSHIRE products come with a hassle-free return and exchange policy. If there is a quality issue, you can get a full refund without having to return the item. For any assistance, please contact our support team via support@norshire.com.

Resolution: 0.01 kPa Measurement Range: 0–150 PSI

Charging Voltage: 5V/1A Operating Current: 2mA Sleep Current: <10μA

NORSHIRE TECH. CO., LIMITED www.norshire.com Email: service@norshire.com MADE IN CHINA